



A NEW BREED OF MDF

An extremely durable
and stable wood panel



IMAGINE HAVING AN MDF
PANEL TRULY DURABLE
AND STABLE ENOUGH FOR
USE OUTSIDE. WITH AND
WITHOUT COATINGS IT
WOULD ENABLE SIMPLE
MANUFACTURE AND
USE IN APPLICATIONS
NOT PREVIOUSLY
CONTEMPLATED FOR MDF.
IMAGINE TRICOYA[®],
A NEW BREED OF MDF.

Cover images:
OUTDOOR BBQ CABINETY
Adelaide, South Australia
Courtesy of Benchmark Fitouts
TRICOYA FACADE
Chile
TRICOYA LANTERNS
New Zealand
DAVID TRUBRIDGE PHOTO BY:
gotyaphoto@icloud.com

tricoya[®] 






ABOUT THE PANEL

Tricoya® is a completely new, high performance MDF panel product. It demonstrates outstanding durability and dimensional stability in the most extreme and challenging environments - both exterior as well as interior, wet and high moisture applications. The product uses proprietary acetylated wood technology and a modified MDF manufacturing process to create a wood panel product with outstanding durability and stability.

Tricoya® was developed by challenging the most fundamental reason for wood swelling: water absorption onto hygroscopic wood fibres due to the presence of hydroxyl groups. The hydroxyl groups (water loving sites) can bind or release water molecules causing wood to swell or shrink.

Acetylation is a revolutionary sustainable process which has been proven on Accoya® solid wood since 2007, and increases the number of naturally occurring hydrophobic acetyl groups in the wood cells using acetic anhydride. The process exchanges the hydroxyl groups (chemical formula: -OH) with acetyl groups (chemical formula: -COCH₃) preventing water absorption at these sites, and thus enhancing the dimensional stability and durability of the wood.

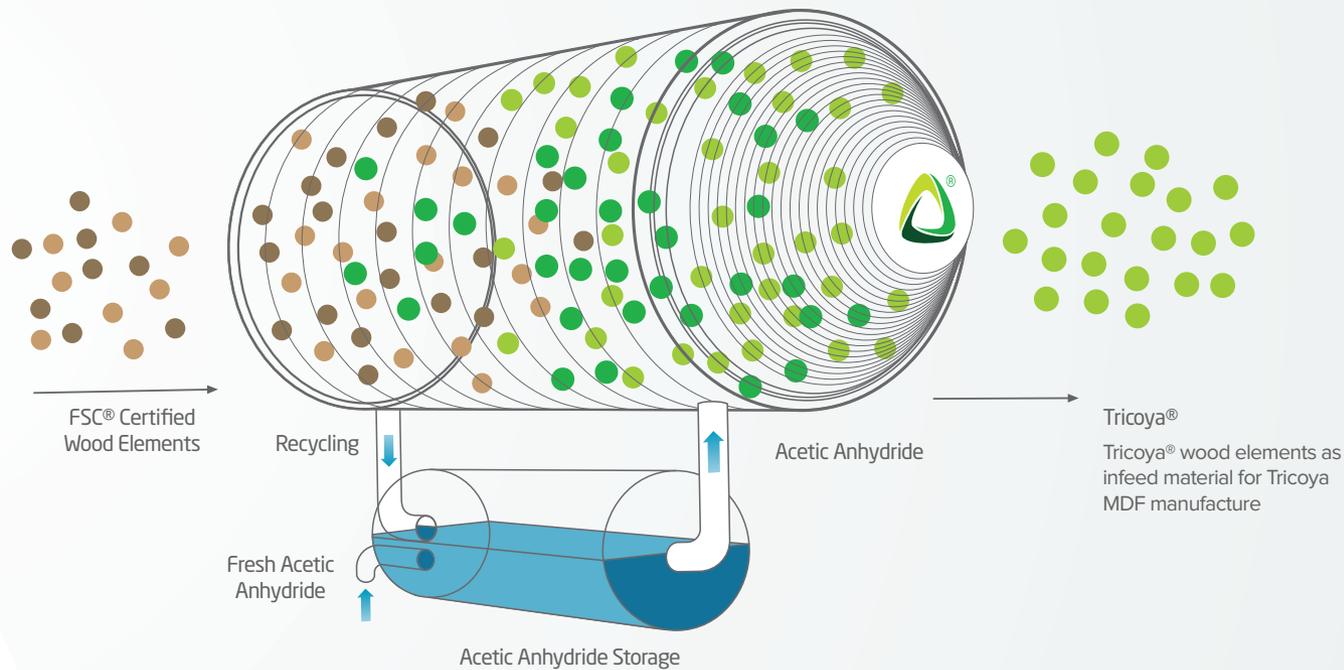

Apart from creating exceptional dimensional stability, the process enables Tricoya® to achieve class 1 durability, leading to resistance to biological decay which exceeds western red cedar and other durable wood species. Termite resistance has also been proven to exceed spotted gum, western red cedar, merbau and PNG Rosewood in extended field trials against Coptotermes in Northern Territory, Australia.

Tricoya® offers a solution for specifiers and consumers in environments of wet, high humidity or fully weather exposed applications to deliver superior performance in a versatile large panel form.

Tricoya® wood fibers are blended at the MDF mill with zero formaldehyde resin to produce a no added formaldehyde finished product.



TRICOYA[®] PANEL BENEFITS



DURABLE

Longer lasting, perfect for outdoor use or wet (interior and exterior) environments



DESIGN FREEDOM

All the design, machining and assembly flexibility of medium density fiberboard



FUNGAL RESISTANCE

Proven as an effective barrier to fungal decay in Australian testing



50 YEAR WARRANTY

Peace of mind with a 50 year Tricoya[®] warranty above ground and 25 years in ground



LOWER MAINTENANCE COSTS

Extended periods between exterior coatings maintenance



DIMENSIONALLY STABLE

Swelling and shrinking dramatically reduced



IDEAL FOR COATING

Improved stability and durability enhances the service life of the coating. Damaged coating will not affect the panel warranty



NO ADDED FORMALDEHYDE

Tricoya[®] complies with CARB 93120 for Phase 2 and NAF requirements



INSECT BARRIER

Indigestible to a wide range of insects, including termites. Tested and proven in Australia. Greatly reduced vulnerability.



The mark of
responsible forestry

PROPERTIES

Tricoya® creates a new class of wood based panel products with class 1 durability and exceptional dimensional stability, suitable for a wide range of exterior applications such as cabinetry, doors, cladding, façade paneling, trim, fascias, soffits, Tricoya® can be cut, machined and installed using techniques and equipment commonly used throughout the building industry and requires low maintenance thereafter. The flexibility of Tricoya® offers endless design opportunities so that it can be cut to size, machined CNC cut, painted, routed, wrapped without impacting its unique properties.

Moisture content

Tricoya® is supplied with a moisture content of between 3% - 5%. An indicative measurement of the moisture content should be made before installation. If a measurement shows a moisture content of 8% or more, this may indicate the presence of "free water" and the Tricoya® should be allowed to dry before processing, gluing or coating. Tricoya cladding should be installed with a ventilated cavity.

Reports and certificates

A H3 above ground durability test with assessment by the ASTM rating system was set up at the University of Malaysia campus, Sarawak. After 4 years exposure the Gabon plywood and exterior MDF exhibited severe decay, teak and western red cedar heartwood exhibited the onset of decay. Tricoya samples exhibited no sign of decay.

Timber Products Inspection, Georgia USA have completed in-ground graveyard tests (AWPA E7) on uncoated Tricoya® for 32 months in the Ground at their Gainesville Florida Site. Tricoya® showed no degradation at the 32 month inspection period while initial decay and termite attack were evident in Burmese teak and both sapele and western red cedar were heavily attacked.

British Board of Agrément (BBA) assessment concludes that Tricoya® is suitable for internal and external non-structural applications (BBA Assessment number M2/49109).

Fire behavior

Tests, according to ASTM E84 (surface burning characteristics), have shown that Tricoya® performs in line with other solid wood species and MDF, and Class C. For copies of any reports please contact your sales representative or visit our website.

PROP TRICOYA TECHNICAL SPECIFICATION SHEET

Property	Range	Test Method	Units ⁶	THICKNESS (MM)				
				9	1	2	15	18
Density	+/-30		kg/m ³	720	720	720	720	680
Internal Bond M	in E	N 319	N/mm ²	0.80	0.80	0.80	0.80	0.80
Modulus of Rupture	Min	EN 310	N/mm ²	30.0	30.0	25.0	20.0	20.0
Modulus of Elasticity M	in E	N 310	N/mm ² 3	,000 3	,000 2	,500 2	,500 2	,500
Screw Holding Face	Min	EN 320 N	-	-	-	9	00 9	00
Screw Holding Edge M	in E	N 320 N	-	-	-		700	700
Free Formaldehyde M	ax E	N 120 m	g/100g <	1.0 <	1.0 <	1.0 <	1.0 <	1.0
Thickness Tolerance	E	N 324-1	mm +	/-0.15	+/-0.15	+/-0.15	+/-0.15	+/-0.15
Thickness Swell (24hrs) M	ax E	N 317 %	2	.52	.02	.01	.51	.5
Thermal Resistance	R	Value m	2 K/W	0.056 0	.085 0	.114 0	.15	0.18
Dimensional Movement								
Length / Width		EN 318 %	+	/- 0.1	+/- 0.1	+/- 0.1	+/- 0.1	+/- 0.1
Thickness		EN 318 %	+	/- 1.0	+/- 1.0	+/- 1.0	+/- 1.0	+/- 1.0
After Boil Test								
Internal Bond M	in E	N 319	N/mm ²	0.65 0	.65	0.65 0	.65	0.65



PERFORMANCE COMES NATURALLY

Many of the benefits observed in Accoya® solid acetylated wood, including enhanced dimensional stability, durability and fungal resistance, hold true for Tricoya®.

The functionality and versatility of wood-based composite panels give them universal appeal. Up until this point, the suitability of MDF panels for exterior and indoor constant wet use environments has been limited and over laid with practical limitations.


Tricoya® combines the versatility, ease of machining, ease of coating and large panel format with the performance heritage and credentials of Accoya®. Accoya® and Tricoya® have been in the European market since 2007 and 2011 respectively. Locally, in Australia and New Zealand, Accoya® and Tricoya® have been in the market and used continuously since 2010. The products are living up to the promise for cabinet makers, shopfitters, manufacturers and specifiers alike.

We encourage you to take a Tricoya® sample, cut it, drill it, soak it and bury it. The panel performs.


FAÇADE TRICOYA®
Chile




Four Year H3 Above Ground Testing.
Borneo, Malaysia. ASTM Decay Rating.

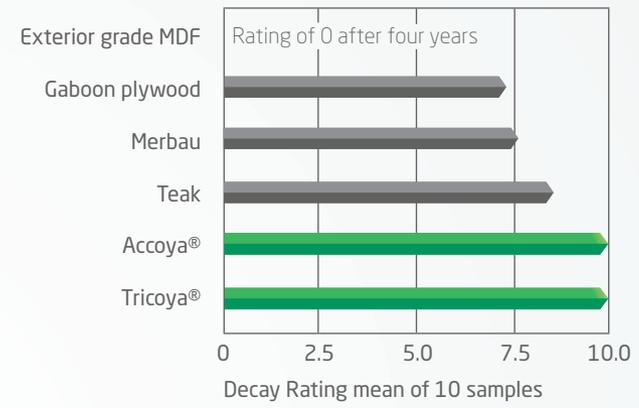


Laboratory Fungal Bioassay, AFRC Australia

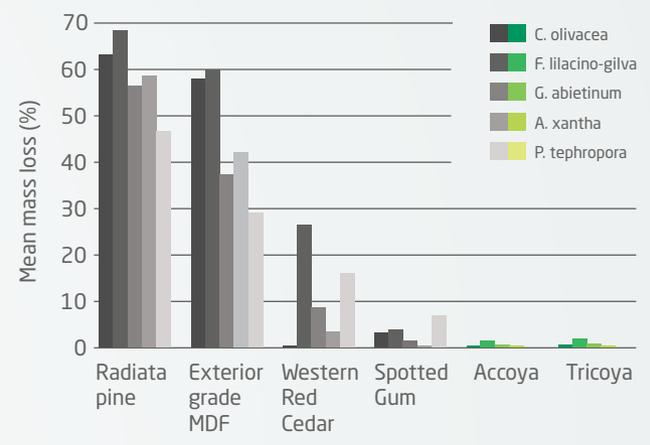

Thickness Swelling

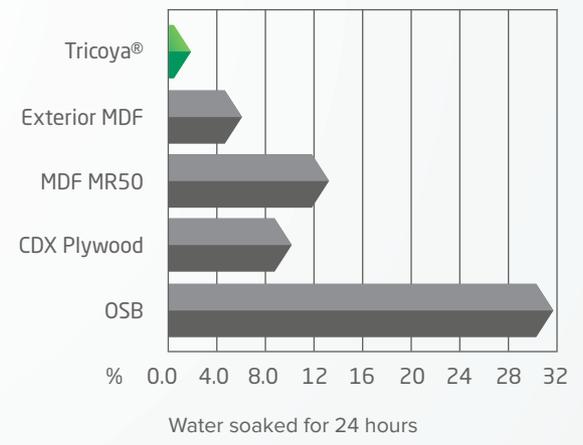

Decay Resistance

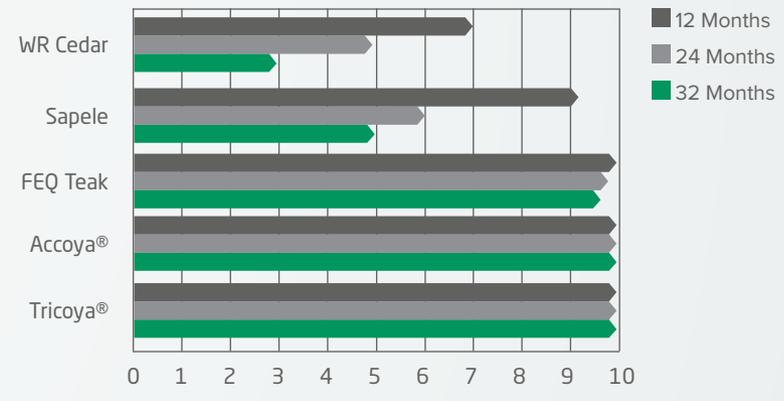

0 to 10 rating, with 10 being the best E7 Stake trials, TPI test site, Gainesville Florida U.S.A. Uncoated.





APPLICATIONS _____

- Outdoor kitchens
- Window and door components
- Door skins
- Trim
- Façade cladding
- Fascia/soffit panels and other secondary exterior applications
- Wet interiors, including wall linings in swimming pools, bathrooms, changing rooms etc
- Signage
- Specialty furniture including lockers, cubicles, chairs & tables
- Play frames, tree houses & exterior composite furniture
- Sound barriers
- And much more...

THE FINISHED ARTICLE

Tricoya® can be cut, coated, sanded, glued, machined and fastened the same as any other high performing wood fiberboard - allowing users all the freedom associated with MDF. The Tricoya® difference is that this can now be done for the outside and with confidence.

Supply

Tricoya is produced in the following standard panel sizes*

6mm 1220x2440, 3050 & 3660

9mm 1220x2440, 3050 & 3660

12mm 1220x2440, 3050 & 3660

15mm 1220x2440, 3050 & 3660

18mm 1220x2440, 3050 & 3660

Other sizes may be produced upon request and typically associated with a minimum order quantity. Potential panel size is governed by the 2440mm press width and longitudinal options of 3660mm to 5490mm depending on container loading options.

Custom thicknesses between 5mm, and 18mm, can be produced with a minimum order quantity. Please check with your sales representative for more information.

Machining and Finishing

Tricoya® may be cut, machined and used in exactly the same way as other wood fiberboards with no change in machinability. Tricoya® is delivered with a 120 grit sanded finish. It may be sanded with finer papers to achieve smoother surfaces. Water based paint systems may be used to decorate Tricoya®. Tricoya® may be laminated with melamine papers, high pressure laminates, wood veneers, foils and other materials. Exterior adhesives such as epoxy, polyurethane, phenol-resorcinol resin and EPI may be used as long as they meet exterior use requirements via ASTM D5751 Wet Use, or other equivalent test method.

All laminates used externally should be of exterior grade. For avoidance of doubt, laminate surfaces are not encompassed by the Tricoya warranty and are subject to their own performance qualifications.

All mechanical fasteners that may come into contact with water, including screws, hinges, fixtures and fittings, should be manufactured from Stainless Steel ANSI type 304 or 316. Internal handles and other furniture that are used in dry conditions may be made from any usually acceptable material. Components used for furniture and other interior applications that are normally installed in dry conditions may utilize galvanized, coated and other metals with low corrosion resistance.

Corrosion testing on naval brass and higher quality aluminum products show that these metals are highly corrosion resistant in direct contact with Tricoya® and may also be considered.

There are many aluminum alloy types. By way of example the following aluminium grades performed well in internal testing: 3003, 6005, 6063, 6061, 5154, 5052, 3052 and 1100.

Fire Rating

Tricoya® is classified as meeting a Class C flame spread rating by the ASTM E84 method.

Insect Resistant

Tricoya® has termite resistance meeting UC4A ground contact requirements and performs better than hardwoods for example from western red cedar and Burmese teak.

See page 7 for full technical property information.

*Dimensions are close approximations based on conversion from metric.



ALFRESCO KITCHEN
ON THE RIVER

VORRAWUT

Vorrawut Materials Co.,Ltd.
vorrawut.com

111/1 Moo 4 Padad, Muang,
Chiang Mai,
Thailand 50100
T: +66 84 388 3891

sales.materials@vorrawut.com



© 2020 Tricoya® Technologies. Tricoya® and the Trimarque Device are registered trademarks owned by Titan Wood Limited ("TWL"), a subsidiary of Accsys Technologies PLC, and may not be used or reproduced without written permission from TWL or Tricoya Technologies Limited, who have exclusive rights to exploit the Tricoya® brand. Some images are courtesy of MEDITE® TRICOYA® EXTREME



DAVID TRUBRIDGE PHOTO BY:
gotyaphoto@icloud.com